

TXV CATALOG



Low Energy and Water Consumption
Easy Montage

Freva is a Member of **FORM** Group of Companies

ABOUT US

FORM Freva Soğutma Sistemleri A.Ş. with its dynamic engineering and manufacturing team based on more than 20 years of knowledge and experience, provides design, manufacturing and turnkey installation services of process water cooling equipment for the comfort and industrial sector.

The devices subject to activity are open and closed type cooling towers, hybrid type (which can operate as semi-wet-semi-dry) cooling towers, dry and adiabatic coolers, evaporative and adiabatic condensers and industrial type fin fan dry type coolers. Especially in today's conditions where energy and water resources are of great importance, our experienced engineer staff aims to support businesses in the process of deciding on the most suitable device for the future by making the necessary feasibility studies through our state-of-the-art product selection programs in order to minimize both energy and water costs in line with the demands of the sector.

MISSION

As FORM Freva Soğutma Sistemleri A.Ş., our mission is to establish a company that continuously develops itself with its dynamic and experienced engineer and manufacturing team, aims at maximum customer satisfaction, has environmental awareness, and pioneers design, project and production services for the expectations of all sectors.

VISION


As a result of our R&D activities that we will carry out continuously, to be the leading brand that offers the latest technological products for the needs of the sector and is preferred.

CONTENTS

Freva TXY series Open Circuit Cooling Tower	5
Advantages of TXY Series Open Circuit Cross Flow Water Cooling Towers	6
Information About Tower Models	6
Freva TXY Series Open Circuit Cross Flow Cooling Tower Equipment	6
Fill, Drift Eliminator and Louver	7
Water Distribution System	7
Axial Fan	7
Belt Driven Fan System	8
Direct Drive Fan System	8
Gear Driven Systems	8
Electric Motor	9
Coating	9
Basin Water Heaters	9
Mechanical Level Float	9
Vibration Switch	10
Our Optional Equipment	10-12
Maintenance Platform	10
Our Optional Equipment	10
Different Color Options	10
Basin Sweeping System	11
Silencer	11
Antivortexhood	11
MCC and DDC Electrical Panel and Automation Systems	12
Electronic Water Level Control	12
Filtration System	12

FREVA TXY series Open Circuit Cooling Tower

Open circuit cooling towers are industrial equipment that works on the principle of direct evaporative cooling. The picture above shows the working principle of an open circuit cooling tower. While the dry and cold air in the outdoor environment enters from the lower part of the cooling tower, the hot water enters from the upper part through the distribution system. This type of work is called cross-flow type, since the direction of the air and water is 90 degrees diagonal to each other. Since there is no extra material between air and water, their cooling capacity is very high. As a result of the process, the cold water collected in the basin leaves the process to be sent to the required equipment.

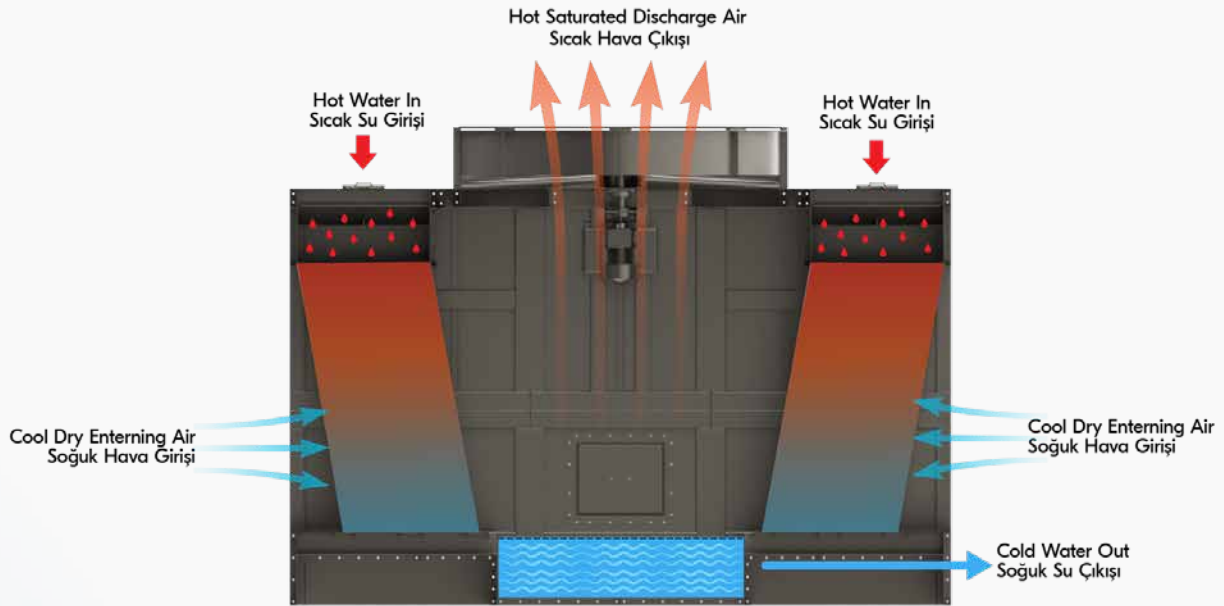

Advantages of TXY Series Open Circuit Cross Flow Water Cooling Towers



- Initial investment costs are low.
- It has low electricity consumption.
- Provides ease of maintenance, operation and commissioning.

Freva TXY series open-circuit cross-flow cooling towers offer a wide selection of work partners. Thanks to its high energy efficiency design, it provides energy savings in businesses. Thanks to its ultra-quiet fan options, it easily adapts to any comfort application.


Information About Tower Models

TXY series open circuit cross flow water cooling towers meet all the demands of its customers with its wide product range. The model range includes tower models with low electricity consumption and high efficiency. It has cooling tower models with low sound levels with its ultra-quiet fan option, and container-sized products that offer comfortable transportation between continents.

Freva TXY Series Open Circuit Cross Flow Cooling Tower Equipment




Fill, Drift Eliminator and Louver

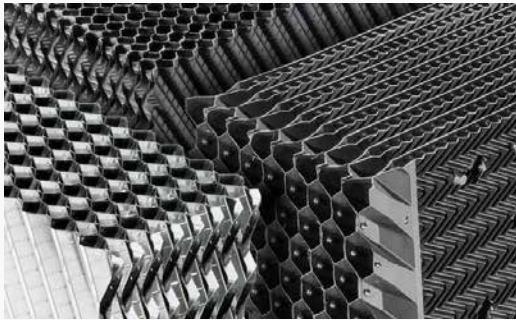

The fillings used in the TXY series are of our special design and are designed to provide maximum heat and mass transfer between air and water. Thanks to its special form, it delays contamination. Except for special cases, it is manufactured from PVC material. It has an operating resistance up to $-5 / 55^{\circ}\text{C}$ and is "ASTM E84 Cls. It is in the A" non-flammability class. The louvers used in the TXY series allow to keep the water in the cooling tower inside and to keep the outdoor pollution out. The design of the louver has been designed in such a way that it takes the fresh air into the tower in the most efficient way. Thanks to its special form, it minimizes the formation of algae by not letting the sunlight in. It prevents the process water out of the cycle by air, up to 0.02% of the cycle water. This reduces water and chemical consumption.

Water Distribution System

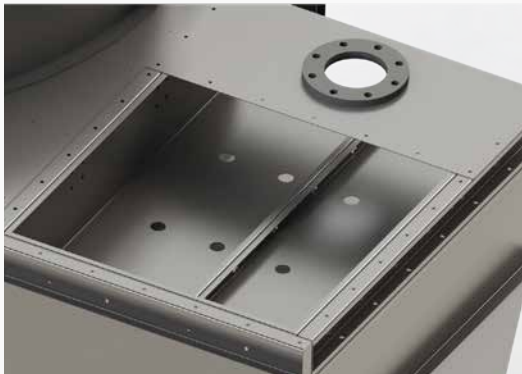

The water distribution system in our TXY series is produced from galvanized steel or stainless steel material. The design of the water distribution system is designed to distribute water evenly on every surface of the fill. In this way, the entire surface of the fillingb is loaded with equal water load.

Axial Fan



Fans in different models and material classes can be used in the TXY series. All fans used are manufactured according to the latest generations of their design classes. Silent, Ultra-quiet options and different material options are available for corrosion resistance.

Belt Driven Fan System



Belt driven systems are used in applications requiring lower fan speeds. It is generally used in applications with a fan diameter of 1800 mm and larger fan diameters. The system is driven by belts specially designed for the TXY series cooling tower. It provides long life with its multi-channel and high hardness. Belt drive system provides ease of maintenance. It provides low noise level on first take offs.

Direct Drive Fan System




These are the systems in which the fan motors are directly coupled to the fan. It is the drive system applied for low fan diameters. It is easy in terms of maintenance and operation.

Gear Driven Systems



In gear driven motor systems, the motor and gearbox are on the same axis. Power transmission is provided by gears. The main component of the gearbox is gears, and the engine rotation speed is reduced by these gears.

Electric Motor

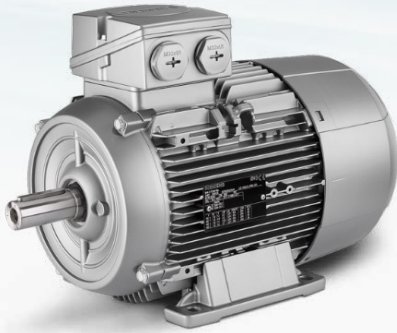

An electric motor is a device that converts electrical energy into mechanical energy. Electric motors generate force by the interaction between the magnetic field and the winding current and are positioned above the carrier base. The motors used in closed-loop water cooling towers have IE3 or higher energy class. The electric motor is the component that creates the fan torque. The torque of the motor is transmitted to the fan by belt or gear.

Coating



The outer body material is generally produced from sheet metal containing 600 grams of zinc per Z600 square meter. The inner and outer surfaces of the sheets are coated with polymer-based epoxy paint. Stainless steel applications are also made according to the customer's request.

Basin Water Heaters



Required for cooling tower operation in winter conditions. The temperature of the basin water is controlled with the help of a temperature transmitter. This prevents the basin water from freezing. Copper and stainless steel materials can be used.

Mechanical Level Float



The float level valve is used for basin water level control, the float height can be adjusted with the horizontally designed arm. When the liquid level rises, the valve closes, or on the contrary, with the rise in the liquid level, the valve opens and begins to discharge.


Vibration Switch



It is located at the top of the tower right next to the fan chimney. It detects the vibration in case of working with vibration in the fan group and ensures that the electric motor is deactivated.

Our Optional Equipment

Maintenance Platform

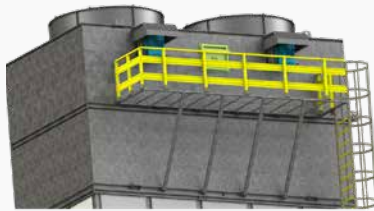

We have specially designed platforms for the maintenance and repair of cooling towers. It is produced from FRP material as standard. It can also be produced as galvanized steel or stainless on special request.

Ultra Quiet Fan




Ultra-quiet fans are very quiet compared to expensive and bulky sound-damping equipment. Specially manufactured ultra-quiet fans produce a noise level of 20 db lower than conventional fans. Ultra-quiet fans are manufactured from 710 mm to 10.400 mm.

Different Color Options




Desired color applications are available according to the needs of our customers. Different color options are offered after our customer specifies the color code they want.

Basin Sweeping System

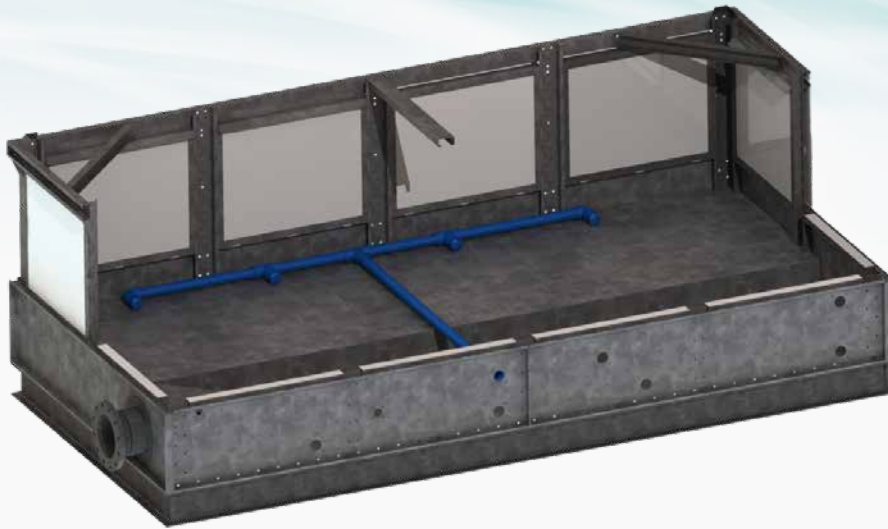


Thanks to our specially designed sweeping system installed in the tower basin, continuous water circulation is provided on the basin floor. In this way, the formation of sediment on the bottom of the tower basin is prevented, and the tower basin remains clean at all times. By preventing tower performance degradation, your tower will always remain clean.

Silencer



Desired sound level values are provided with special silencers designed to provide the desired sound levels in cooling towers.

Antivortexhood

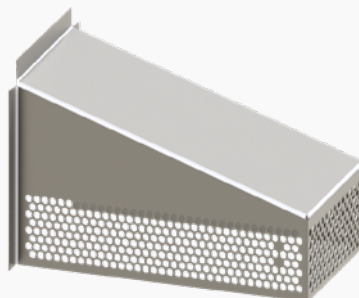

If the pump is not supplied with enough water, it will run dry. As a result, unhealthy operation and malfunctions are inevitable. The main purpose of Antivortexhood is to protect the circulation pump against dry running and cavitation.

MCC and DDC Electrical Panel and Automation Systems



The water cooling tower automation panel provides the operation of the Fan, Pump and Electric heaters on the tower. For the operation of these equipments, motor driver screens, buttons and signal lamps located on the panel lining sheet are used. The first fan drive is called the Master in the system. The entire control scenario runs through this driver. Tower outlet water temperature sensor PT100 is connected. Depending on the temperature, it operates both itself and other drivers with PI control. It also provides output to the pump motor during its operation. It performs the start and stop operations with the signal to be received from the vibration switches. The panel provides power output to the electric heater and this output is switched on and off with buttons. The electric heater performs its operation depending on its own thermostat.

Electronic Water Level Control



It is designed to control the pool water level electromechanically. Unaffected by variable environmental conditions, the water level in the basin is measured magnetically and brought to the desired level with a solenoid valve. The mains pressure should be at most 10 bar. Electronic equipment is also available for overflow or low water level alarms. In this way, the operation of the cooling tower is facilitated and the basin water level can be monitored from the central systems.

Filtration System



The water cooling tower filtration system filters the particles in the water cooled in the cooling tower and removes them from the cooling tower. In this way, the performance of the cooling tower will be increased. The risk of corrosion is reduced. It will provide low energy and chemical consumption.



Notes

A series of horizontal dashed lines for writing notes, spanning the width of the page.



Notes

A series of horizontal dashed lines for writing notes, spanning the width of the page.



Notes

A series of horizontal dashed lines for writing notes, spanning the width of the page.



FORM

FORM FREVA SOĞUTMA SİSTEMLERİ A.Ş.

🌐 www.formfreva.com ✉ info@formgroup.com
FORM Freva Soğutma Sistemleri A.Ş.
Eyüpsultan Mah. İbni Sina Cad. No: 7 Sancaktepe, İstanbul, Türkiye