

WSAT-YSC4 WSAN-YSC4

80.3÷240.6

SPINchiller⁴

Liquid chiller

WSAT-YSC4: cooling only
 WSAN-YSC4: Reversible heat pump
 Air cooled
 Outdoor installation
Capacity from 215 to 675 kW



Clivet participates in the EUROVENT "Liquid Chilling Packages and Hydronic Heat Pumps". The products concerned feature on the website www.eurovent-certification.com




compliant
ErP

- ✓ Scroll compressors, EC axial fans and two independent circuits for high reliability
- ✓ High full load and seasonal efficiency (Excellence version), high seasonal efficiency and compact dimensions (Premium version)
- ✓ Refrigerant R32 - GWP = 675
- ✓ Domestic hot water up to 55°C, low water temperature down to -12°C
- ✓ Plate heat exchanger or shell & tube exchanger
- ✓ Three acoustic configurations
- ✓ Modular operation management, up to 8 units in cascade
- ✓ Integrated hydronic assembly, system tank, partial heat recovery and total heat recovery (only for chiller)

functions and features



dimensions and clearances

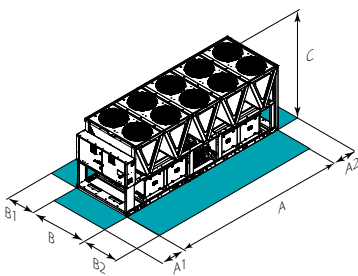

CAUTION!

For trouble-free operation of the unit it is essential to maintain the safety distances indicated by the green areas.

The above mentioned data are referred to standard units for the constructive configurations indicated. For all the other configurations, refer to the relative Technical Bulletin.

SC-EXC Compressors soundproofing (SC)-Excellence

SC-PRM Compressors soundproofing (SC)-Premium

Size		WSAT-YSC4	80.3	100.4	115.4	130.4	155.5	170.5	185.5	210.6	225.6	240.6
SC-EXC A - Length	mm		2925	2925	4175	4175	5417	5417	5417	6680	6680	6680
SC-EXC B - Width	mm		2228	2228	2228	2228	2228	2228	2228	2228	2228	2228
SC-EXC C - Height	mm		2535	2535	2535	2535	2535	2535	2535	2535	2535	2535
SC-EXC A1	mm		1500	1500	1500	1500	1500	1500	1500	1500	1500	1500
SC-EXC A2	mm		700	700	700	700	700	700	700	700	700	700
SC-EXC B1	mm		1200	1200	1200	1200	1200	1200	1200	1200	1200	1200
SC-EXC B2	mm		2250	2250	2250	2250	2250	2250	2250	2250	2250	2250
SC-EXC Operating weight	kg		1879	1898	2345	2494	2979	3152	3314	3810	3943	4100

Size		WSAT-YSC4	90.3	110.4	130.4	145.4	170.5	185.5	210.6	225.6	240.6
SC-PRM A - Length	mm		2925	2925	2925	4175	4175	4175	5417	5417	5417
SC-PRM B - Width	mm		2228	2228	2228	2228	2228	2228	2228	2228	2228
SC-PRM C - Height	mm		2535	2535	2535	2535	2535	2535	2535	2535	2535
SC-PRM A1	mm		1500	1500	1500	1500	1500	1500	1500	1500	1500
SC-PRM A2	mm		700	700	700	700	700	700	700	700	700
SC-PRM B1	mm		1200	1200	1200	1200	1200	1200	1200	1200	1200
SC-PRM B2	mm		2250	2250	2250	2250	2250	2250	2250	2250	2250
SC-PRM Operating weight	kg		1893	2000	2116	2576	2763	2938	3396	3563	3684

Size		WSAN-YSC4	80.3	90.4	100.4	110.4	120.4	130.4	145.4	160.4	185.5	210.6	225.6	240.6
SC-EXC A - Length	mm		3118	4114	4114	4114	4114	5091	5091	5091	6066	6066	7045	7045
SC-EXC B - Width	mm		2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250
SC-EXC C - Height	mm		2520	2520	2520	2520	2520	2520	2520	2520	2520	2520	2520	2520
SC-EXC A1	mm		1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500
SC-EXC A2	mm		700	700	700	700	700	700	700	700	700	700	700	700
SC-EXC B1	mm		1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200
SC-EXC B2	mm		1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200
SC-EXC Operating weight	kg		2300	2631	2652	2772	2890	3295	3438	3594	4097	4199	4761	4861

Size		WSAN-YSC4	90.3	100.3	110.4	120.4	130.4	145.4	160.4	185.5	210.6	225.6	240.6
SC-PRM A - Length	mm		3118	3118	3118	3118	4114	4114	4114	5091	5091	6066	6066
SC-PRM B - Width	mm		2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250
SC-PRM C - Height	mm		2520	2520	2520	2520	2520	2520	2520	2520	2520	2520	2520
SC-PRM A1	mm		1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500
SC-PRM A2	mm		700	700	700	700	700	700	700	700	700	700	700
SC-PRM B1	mm		1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200
SC-PRM B2	mm		1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200
SC-PRM Operating weight	kg		2320	2445	2345	2562	2893	3018	3143	3779	3867	4310	4435



technical data

Size	▶▶	WSAT-YSC4	80.3	100.4	115.4	130.4	155.5	170.5	185.5	210.6	225.6	240.6		
ST/SC-EXC	◆	Cooling capacity (EN 14511:2022)	(1)	kW	222	267	314	364	423	472	520	573	624	675
ST/SC-EXC		Total power input (EN 14511:2022)	(1)	kW	69,4	85,5	99,8	115	135	149	167	184	200	218
ST/SC-EXC		EER (EN 14511:2022)	(1)	-	3,20	3,12	3,15	3,17	3,15	3,16	3,11	3,12	3,12	3,10
ST/SC-EXC		SEER	(4)	-	4,70	4,67	4,78	4,75	4,92	5,00	4,96	4,94	4,96	4,90
ST/SC-EXC		$\eta_{s,c}$	(4)	%	185,2	183,8	188,3	187,1	193,6	197,0	195,5	194,6	195,4	193,1
ST/SC-EXC		Refrigeration circuits		Nr					2					
ST/SC-EXC		No. of compressors		Nr	3		4			5			6	
ST/SC-EXC		Type of compressors		-					SCROLL					
ST/SC-EXC		Refrigerant		-					R-32					
ST/SC-EXC		Standard power supply		V					400/3~/50					
ST-EXC		Sound power level	(3)	dB(A)	90	91	92	93	94	95	95	96	96	97
SC-EXC		Sound power level	(3)	dB(A)	87	88	89	90	90	91	91	92	92	93
EN-EXC		Sound power level	(3)	dB(A)	84	84	86	86	86	87	88	88	88	89

Size	▶▶	WSAT-YSC4	90.3	110.4	130.4	145.4	170.5	185.5	210.6	225.6	240.6		
ST/SC-PRM	◆	Cooling capacity (EN 14511:2022)	(1)	kW	232	291	333	384	443	483	537	590	644
ST/SC-PRM		Total power input (EN 14511:2022)	(1)	kW	84,5	102	124	139	156	179	199	209	233
ST/SC-PRM		EER (EN 14511:2022)	(1)	-	2,74	2,85	2,70	2,77	2,84	2,70	2,70	2,82	2,76
ST/SC-PRM		SEER	(4)	-	4,38	4,48	4,46	4,47	4,65	4,64	4,61	4,69	4,62
ST/SC-PRM		$\eta_{s,c}$	(4)	%	172,3	176,1	175,4	175,8	183,0	182,5	181,2	184,7	181,9
ST/SC-PRM		Refrigeration circuits		Nr					2				
ST/SC-PRM		No. of compressors		Nr	3		4			5			6
ST/SC-PRM		Type of compressors		-					SCROLL				
ST/SC-PRM		Refrigerant		-					R-32				
ST/SC-PRM		Standard power supply		V					400/3~/50				
ST-PRM		Sound power level	(3)	dB(A)	90	91	92	93	94	94	95	96	96
SC-PRM		Sound power level	(3)	dB(A)	87	88	89	89	90	90	91	92	92
EN-PRM		Sound power level	(3)	dB(A)	84	86	86	87	87	88	89	89	89

Size	▶▶	WSAN-YSC4	80.3	90.4	100.4	110.4	120.4	130.4	145.4	160.4	185.5	210.6	225.6	240.6		
ST/SC-EXC	◆	Cooling capacity (EN 14511:2022)	(1)	kW	215	240	265	290	320	355	390	430	500	555	610	655
ST/SC-EXC		Total power input (EN 14511:2022)	(1)	kW	72,9	76,4	84,7	94,9	106	114	128	143	163	188	198	218
ST/SC-EXC		EER (EN 14511:2022)	(1)	-	2,95	3,14	3,13	3,05	3,02	3,11	3,04	3,00	3,06	2,96	3,08	3,01
ST/SC-EXC		SEER	(4)	-	4,45	4,79	4,74	4,81	4,84	4,86	4,78	4,72	4,88	4,84	4,89	4,86
ST/SC-EXC		$\eta_{s,c}$	(4)	%	175,0	188,5	186,6	189,4	190,4	191,3	188,1	186,0	192,1	190,7	192,6	191,5
ST/SC-EXC	◆	Heating capacity (EN 14511:2022)	(2)	kW	225	255	280	310	335	375	415	455	530	585	640	685
ST/SC-EXC		Total power input (EN 14511:2022)	(2)	kW	69,9	78,8	85,6	95,2	103	114	125	137	160	178	199	211
ST/SC-EXC		COP (EN 14511:2022)	(2)	-	3,22	3,24	3,27	3,26	3,26	3,29	3,32	3,31	3,32	3,28	3,22	3,24
ST/SC-EXC		Refrigeration circuits		Nr						2						
ST/SC-EXC		No. of compressors		Nr	3			4				5		6		
ST/SC-EXC		Type of compressors		-						SCROLL						
ST/SC-EXC		Refrigerant		-						R-32						
ST/SC-EXC		Standard power supply		V						400/3~/50						
SC-EXC		Sound power level	(3)	dB(A)	87	88	89	89	89	91	91	91	92	92	93	93
EN-EXC		Sound power level	(3)	dB(A)	84	85	86	86	86	86	87	87	88	89	90	90

Directive ErP (Energy Related Products)

SCOP - AVERAGE Climate - W35	(4)	-	3,73	3,90	3,92	4,10	4,08	4,05	4,00	4,10	-	-	-	-
$\eta_{s,H}$	(4)	%	146	153	154	161	160	159	157	161	-	-	-	-

Size	▶▶	WSAN-YSC4	90.3	100.3	110.4	120.4	130.4	145.4	160.4	185.5	210.6	225.6	240.6		
ST/SC-PRM	◆	Cooling capacity (EN 14511:2022)	(1)	kW	235	255	275	300	335	370	405	480	530	585	630
ST/SC-PRM		Total power input (EN 14511:2022)	(1)	kW	83,7	94,1	102	116	119	136	155	172	200	207	227
ST/SC-PRM		EER (EN 14511:2022)	(1)	-	2,80	2,71	2,70	2,59	2,81	2,72	2,61	2,80	2,65	2,83	2,77
ST/SC-PRM		SEER	(4)	-	4,26	4,24	4,35	4,37	4,55	4,57	4,33	4,64	4,62	4,66	4,64
ST/SC-PRM		$\eta_{s,c}$	(4)	%	167,2	166,7	171,0	171,6	178,9	179,9	170,1	182,8	181,8	183,4	182,5
ST/SC-PRM	◆	Heating capacity (EN 14511:2022)	(2)	kW	240	265	285	315	350	385	420	500	555	610	655
ST/SC-PRM		Total power input (EN 14511:2022)	(2)	kW	76,4	85,5	92,3	102	112	124	134	157	175	191	206
ST/SC-PRM		COP (EN 14511:2022)	(2)	-	3,15	3,10	3,09	3,09	3,12	3,10	3,13	3,19	3,17	3,18	3,18
ST/SC-PRM		Refrigeration circuits		Nr						2					
ST/SC-PRM		No. of compressors		Nr	3			4			5		6		
ST/SC-PRM		Type of compressors		-						SCROLL					
ST/SC-PRM		Refrigerant		-						R-32					
ST/SC-PRM		Standard power supply		V						400/3~/50					
SC-PRM		Sound power level	(3)	dB(A)	87	88	88	88	90	90	90	91	91	92	92
EN-PRM		Sound power level	(3)	dB(A)	85	86	86	86	86	87	87	88	89	90	90

Directive ErP (Energy Related Products)

SCOP - AVERAGE Climate - W35	(4)	-	3,47	3,64	3,83	3,87	3,80	3,64	3,82	3,91	-	-	-
$\eta_{s,H}$	(4)	%	136	143	150	152	149	143	150	153	-	-	-

(1) Data calculated in compliance with Standard EN 14511:2022 referred to the following conditions:

Internal exchanger water temperature = 12/7°C; Outdoor heat exchanger inlet air temperature = 35°C

(2) Data calculated in compliance with Standard EN 14511:2022 referred to the following conditions:

Internal exchanger water temperature = 40/45°C; Outdoor heat exchanger inlet air temperature 7

D.B. /6 (°C) W.B.

(3) Sound pressure levels are referred to units operating at nominal load in nominal conditions.

Measurements are carried out accordingly to UNI EN ISO 9614-1 at nominal standard conditions

defined in respective regulations: EU 2016/2281, UE 813/2013, UE 811/2013.

(4) Data calculated according to the EN 14825:2018 Regulation

The Product is compliant with the Erp (Energy Related Products) European Directive. It includes the Commission delegated Regulation (EU) No 811/2013 (rated heat output ≤70 kW at specified reference conditions), the Commission delegated Regulation (EU) No 813/2013 (rated heat output ≤400 kW at specified reference conditions) and the Commission delegated Regulation (EU) No 2016/2281, also known as Ecodesign Lot21.

versions and configurations

VERSION:

EXC	Excellence (Standard)
PRM	Premium

EXTERNAL SECTION FAN CONSUMPTION REDUCTION:

CREFB	Device for fan consumption reduction of the external section, ECOBREEZE type (Standard)
--------------	---

ENERGY RECOVERY:

-	Energy recovery: not required (Standard)
D	Partial energy recovery
R	Total energy recovery (WSAT-YSC4 only)

EVAPORATOR

 EVPHE	Plate heat exchanger (Standard)
EVFTP	Shell and tube evaporator PED test

ACOUSTIC CONFIGURATION:

ST	Standard acoustic configuration
SC	Acoustic configuration with compressor soundproofing (Standard)
EN	Super-silenced acoustic configuration

LOW TEMPERATURE (WSAT-YSC4 ONLY):

-	Energy recovery: not required (Standard)
B	Water low temperature

accessories

1PM	Hydropack with 1 pump
1PMV	Hydropack user side with nr.1 inverter pump
1PMH	Hydropack with nr.1 high static pressure pump
1PMVH	Hydropack user side with nr.1 high static pressure inverter pump
2PM	Hydropack user side with 2 pumps
2PMV	Hydropack user side with no.2 of inverter pumps
2PMH	Hydropack user side with nr.2 high static pressure pump
2PMVH	Hydropack lato utilizzo con n°2 pompe ad inverter alta prevalenza
IVFDT	Inverter driven variable flow-rate user side control depending on the temperature differential
IFWX	Steel mesh strainer on the water side
CSVX	Couple of manually operated shut-off valves
ACC	Storage tank
AMMX	Rubber antivibration mounts
CONTA2	Energy meter
RCMRX	Remote control via microprocessor control
PSX	Mains power supply
CMSC10	Serial communication module for LonWorks supervisor
CMSC9	Serial communication module for Modbus supervisor
CMSC11	Serial communication module for BACnet-IP supervisor
SCP4	Set-point compensation with 0-10 V signal
SPC1	Set point compensation with 4-20 mA signal
ECS	ECOSHARE function for the automatic management of a group of units
PFCP	Power factor correction capacitors (cosfi > 0.9)
SFSTR	Disposal for inrush current reduction
RE-25	Electrical panel antifreeze protection for min. outdoor temperature down to -25°C

Accessories whose code ends with "X" are supplied separately

MHP	High and low pressure gauges
SDV	Cutoff valve on compressor supply and return
AMMSX	Anti-seismic spring antivibration mounts
RPRI	Refrigerant leak detector in the casing
DML4-20	Demand limit with 4-20 mA
DML0-10	Demand limit with 0-10 V
PFGP	Soundproofing paneling of the pumping unit
PSWSA	Differential pressure switch water side with antifreeze protection

Only WSAT-YSC4:

PPBM	Microchannel coils protection panels
PGCC	Finned coil protection grilles and compressor compartment
CCME	Microchannel e-coated coil
RE-39	Electrical panel antifreeze protection for min. outdoor temperature down to -39°C
IVFEDT	Variable flow-rate control of the inverter pump external to the unit depending on the temperature differential

Only WSAN-YSC4:

CCCA	Copper / aluminium condenser coil with acrylic lining
CCCA1	Condenser coil with Aluminium Energy Guard DCC treatment
PGCCH	Anti-hail protection grilles
PGFC	Finned coil protection grill