


### ELFOEnergy Storm EVO

#### Liquid chiller

WSAT-YES: cooling only  
 WSAN-YES: Reversible heat pump  
 Air cooled  
 Outdoor installation  
**Capacity from 53,1 to 85,1 kW**

HYDRONIC

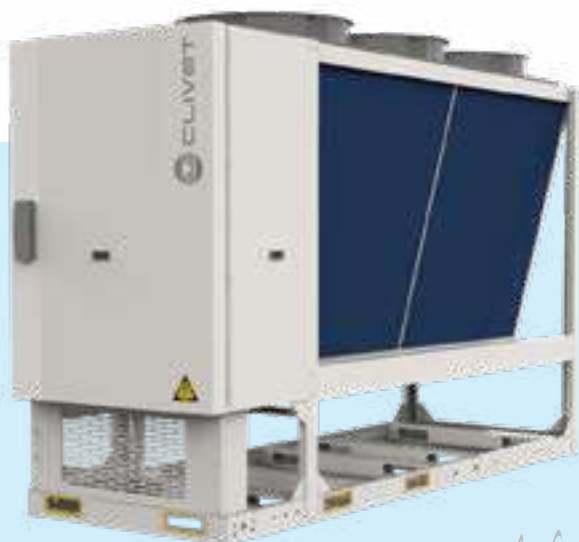

- ✓ Full inverter technology with scroll or rotary compressors
- ✓ Application versatility with modular concept
- ✓ Refrigerant R32 - GWP = 675
- ✓ High full load and seasonal efficiency with compact dimensions
- ✓ Domestic hot water up to 55°C, low water temperature down to -8°C
- ✓ Three acoustic levels: standard, silenced and super-silenced
- ✓ Modular operation management, up to 16 units in cascade
- ✓ Available in hybrid version in combination with boiler



Clivet participates in the EUROVENT "Liquid Chilling Packages and Hydronic Heat Pumps". The products concerned feature on the website [www.eurovent-certification.com](http://www.eurovent-certification.com)



compliant ErP



### functions and features



Cooling only (WSAT-YES)



Heat pump (WSAN-YES)



Air cooled



Outdoor installation



R-32



Hermetic rotary



Hermetic Scroll



Full inverter



Electronic expansion valve




Control4 NRG management



Hybrid system

### dimensions and clearances



#### CAUTION!

For trouble-free operation of the unit it is essential to maintain the safety distances indicated by the green areas.

Size	▶▶ WSAT-YES	18.2	20.2	25.2	30.2	35.2
A - Length	mm	2364	2364	3220	3220	3220
B - Width	mm	1130	1130	1130	1130	1130
C - Height	mm	2155	2155	2155	2155	2155
A1	mm	800	800	800	800	800
A2	mm	800	800	800	800	800
B1	mm	500	500	500	500	500
B2	mm	500	500	500	500	500
Operating weight	kg	575	575	725	725	725

Size	▶▶ WSAN-YES	18.2	20.2	25.2	30.2	35.2
A - Length	mm	2364	2364	3220	3220	3220
B - Width	mm	1130	1130	1130	1130	1130
C - Height	mm	2155	2155	2155	2155	2155
A1	mm	800	800	800	800	800
A2	mm	800	800	800	800	800
B1	mm	500	500	500	500	500
B2	mm	500	500	500	500	500
Operating weight	kg	590	590	796	796	796

The above mentioned data are referred to standard units for the constructive configurations indicated. For all the other configurations, refer to the relative Technical Bulletin.

## versions and configurations

### TYPE OF FANS:

**VENDC** DC high efficiency fan (Standard)

## technical data

Size	▶▶ WSAT-YES	18.2	20.2	25.2	30.2	35.2
♦ Cooling capacity (EN 14511:2022)	(1) kW	53,1	59,2	72,2	77,5	85,1
Total power input (EN 14511:2022)	(1) kW	171	19,8	22,5	24,3	27,5
EER (EN 14511:2022)	(1) -	3,10	2,99	3,21	3,19	3,10
SEER	(4) -	4,85	4,84	4,89	4,81	4,74
$\eta_{sc}$	(4) %	190,8	190,6	192,6	189,5	186,4
Refrigeration circuits	Nr			1		
No. of compressors	Nr			2		
Type of compressors	-	ROTARY INVERTER		SCROLL INVERTER		
Refrigerant	-			R-32		
Standard airflow	l/s	6889	6889	10333	10333	10333
Standard power supply	V			400/3N~/50		
Sound power level	(3) dB(A)	82	82	81	84	85
Size	▶▶ WSAN-YES	18.2	20.2	25.2	30.2	35.2
♦ Cooling capacity (EN 14511:2022)	(1) kW	53,3	58,9	72,0	77,7	85,0
Total power input (EN 14511:2022)	(1) kW	18,0	20,3	22,8	25,0	29,2
EER (EN 14511:2022)	(1) -	2,95	2,90	3,15	3,10	2,91
SEER	(4) -	4,57	4,51	4,64	4,62	4,50
$\eta_{sc}$	(4) %	179,8	177,4	182,6	181,8	177,0
♦ Heating capacity (EN 14511:2022)	(2) kW	53,0	66,0	79,3	84,7	91,0
Total power input (EN 14511:2022)	(2) kW	16,5	20,6	23,8	25,7	28,0
COP (EN 14511:2022)	(2) -	3,21	3,20	3,33	3,29	3,25
Refrigeration circuits	Nr			1		
No. of compressors	Nr			2		
Type of compressors	-	ROTARY INVERTER		SCROLL INVERTER		
Refrigerant	-			R-32		
Standard airflow	l/s	6889	6889	10333	10333	10333
Standard power supply	V			400/3N~/50		
Sound power level	(3) dB(A)	82	82	81	84	85
<b>Directive ErP (Energy Related Products)</b>						
ErP Energy Class - AVERAGE Climate - W35	-	A++	A++	A++	A++	-
SCOP - AVERAGE Climate - W35	(4) -	4,04	4,03	4,08	4,07	4,06
$\eta_{sh}$	(4) %	159	158	160	160	159

(1) Data calculated in compliance with Standard EN 14511:2022 referred to the following conditions: Internal exchanger water temperature = 12/7°C; Outdoor heat exchanger inlet air temperature = 35°C

(2) Data calculated in compliance with Standard EN 14511:2022 referred to the following conditions: Internal exchanger water temperature = 40/45°C; Outdoor heat exchanger inlet air temperature 7 D.B. /6 (°C) W.B.

(3) Sound pressure levels are referred to units operating at nominal load in nominal conditions. Measurements are carried out accordingly to UNI EN ISO 9614-1 at nominal standard conditions defined in respective regulations: EU 2016/2281, UE 813/2013, UE 811/2013.

(4) Data calculated according to the EN 14825:2018 Regulation

The Product is compliant with the Erp (Energy Related Products) European Directive. It includes the Commission delegated Regulation (EU) No 811/2013 (rated heat output ≤70 kW at specified reference conditions), the Commission delegated Regulation (EU) No 813/2013 (rated heat output ≤400 kW at specified reference conditions).

## accessories

<b>HYGU1V</b>	User side hydronic group with 1 inverter pump
<b>ACIMP</b>	Steel inertial storage tank
<b>IFWX</b>	Steel mesh strainer on the water side
<b>AVIBX</b>	Anti-vibration mount support
<b>PGFC</b>	Finned coil protection grill
<b>AMODX</b>	Steel mesh strainer on the water side
<b>CCKMUX</b>	Pipe plug kit for modular units
<b>AVIBI</b>	Anti-vibration mount support
<b>REMAUX</b>	Advanced remote control module for auxiliary controls of shoen/storm units
<b>IFWI</b>	Steel mesh strainer on the water side include in the packaging (available

only with options: ASING)

<b>IFWCX</b>	Steel mesh strainer on the water side for units in modular configuration (available only with options: AMODX)
<b>PGFCX</b>	Finned coil protection grill

### Only WSAT-YES:

**CCME** Microchannel e-coated coil

### Only WSAN-YES:

<b>CCCA</b>	Copper / aluminium condenser coil with acrylic lining
<b>CCCA1</b>	Condenser coil with Aluminium Energy Guard DCC treatment
<b>3DHW</b>	Three-way valve for domestic hot water

Accessories whose code ends with "X" are supplied separately

Data contained in this document are not binding and may be changed by the Manufacturer without notice